

BMD-450C


BS-400LA

Technical data BS-400LA	
Sealing type	L-sealing by means of L-bar
Power supply	380V/50-60Hz/3phase
Max packing capacity	35 packs per minute (depends on product size)
Sealing height	≤125 mm
Packing width	≤350 mm
Product size	≤400 mm width+height≤400 mm ≤480 mm length+height≤480 mm
Film type	center-folded polyolefin (POF) film
Max film size	530mm x 280mm x 280mm(outer diameter)
Power consumption	1.5 kW
Working height	780-850 mm
Air pressure	≤0.5MPa (5 bar)
Sealing system	permanently heated seal bar coated with Teflon
Machine material	carbon steel
Weight	300kg

Technical data BMD-450C	
Power supply	380V/50-60Hz/3phase
Oven size	1200mm(L), entrance 450(W) x 220(H) mm
Conveyor speed	variable, 40 m/min
Conveyor	chains with rotating silicon coated rods
Power consumption	7kW
Working height	780-850 mm
Machine material	carbon steel
Weight	160kg


BS-400LA + BMD-450C


Automatic L-bar Sealing & Shrink Packing Machine

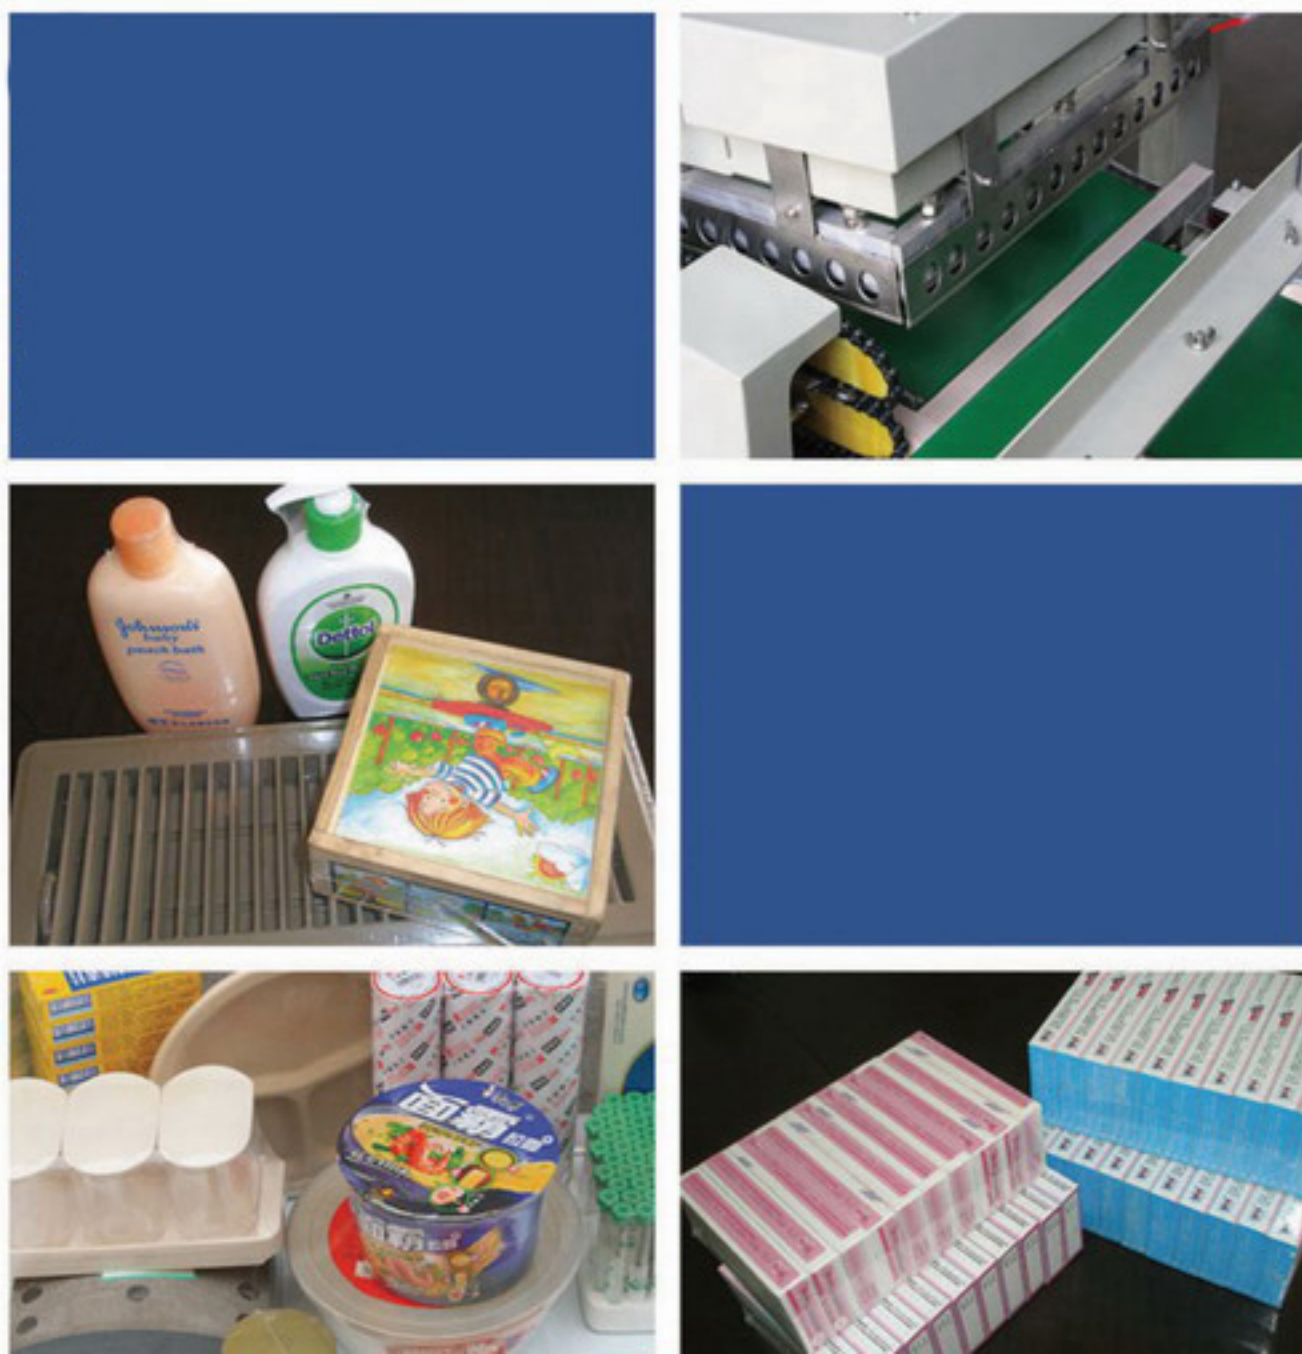


Applicability


Single and group products of medicine, food, drinking, stationery, printings, cosmetic, electronic products, toys, auto parts, tableware, etc.

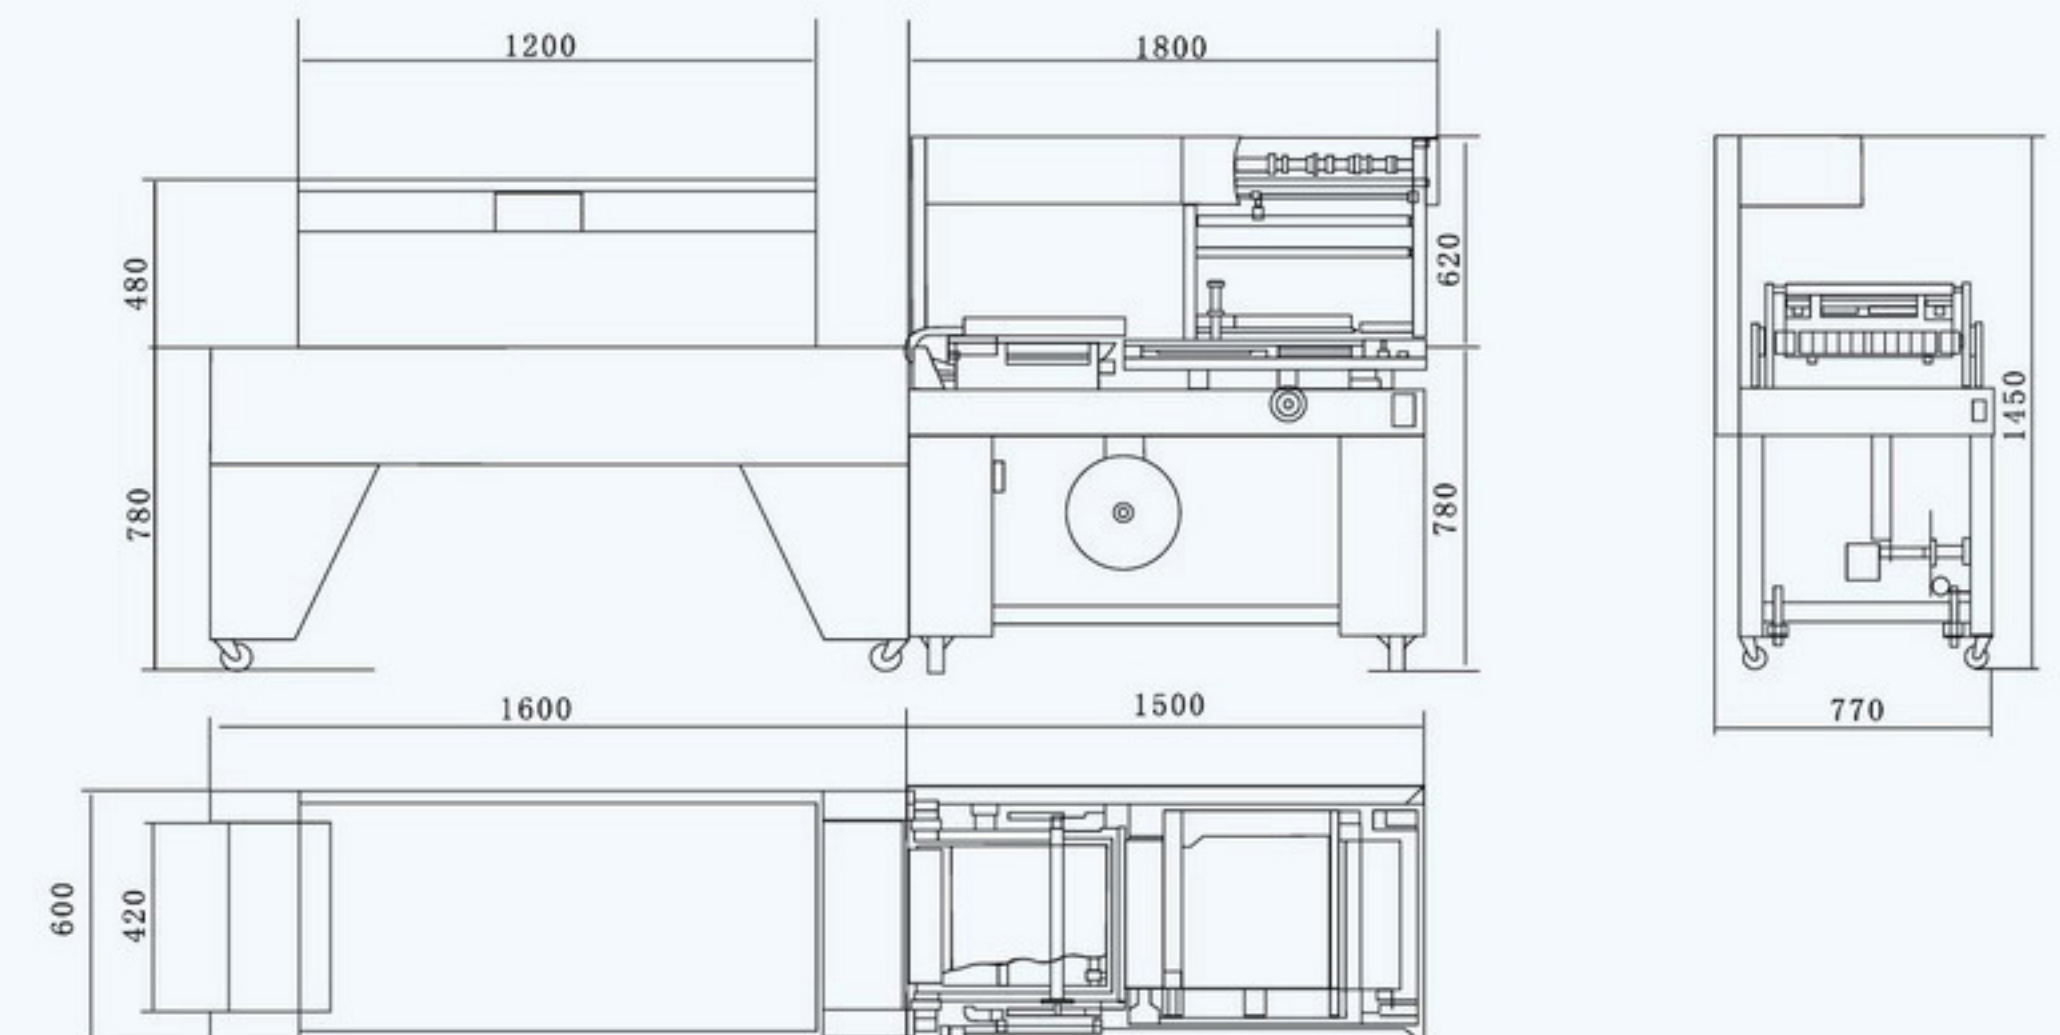

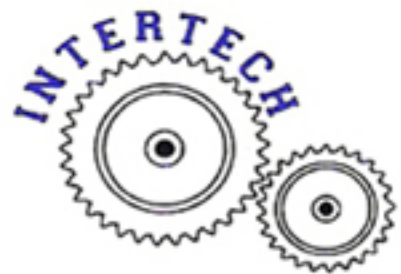


AUTOMATIC SHRINK PACKING MACHINE : IET - 15P

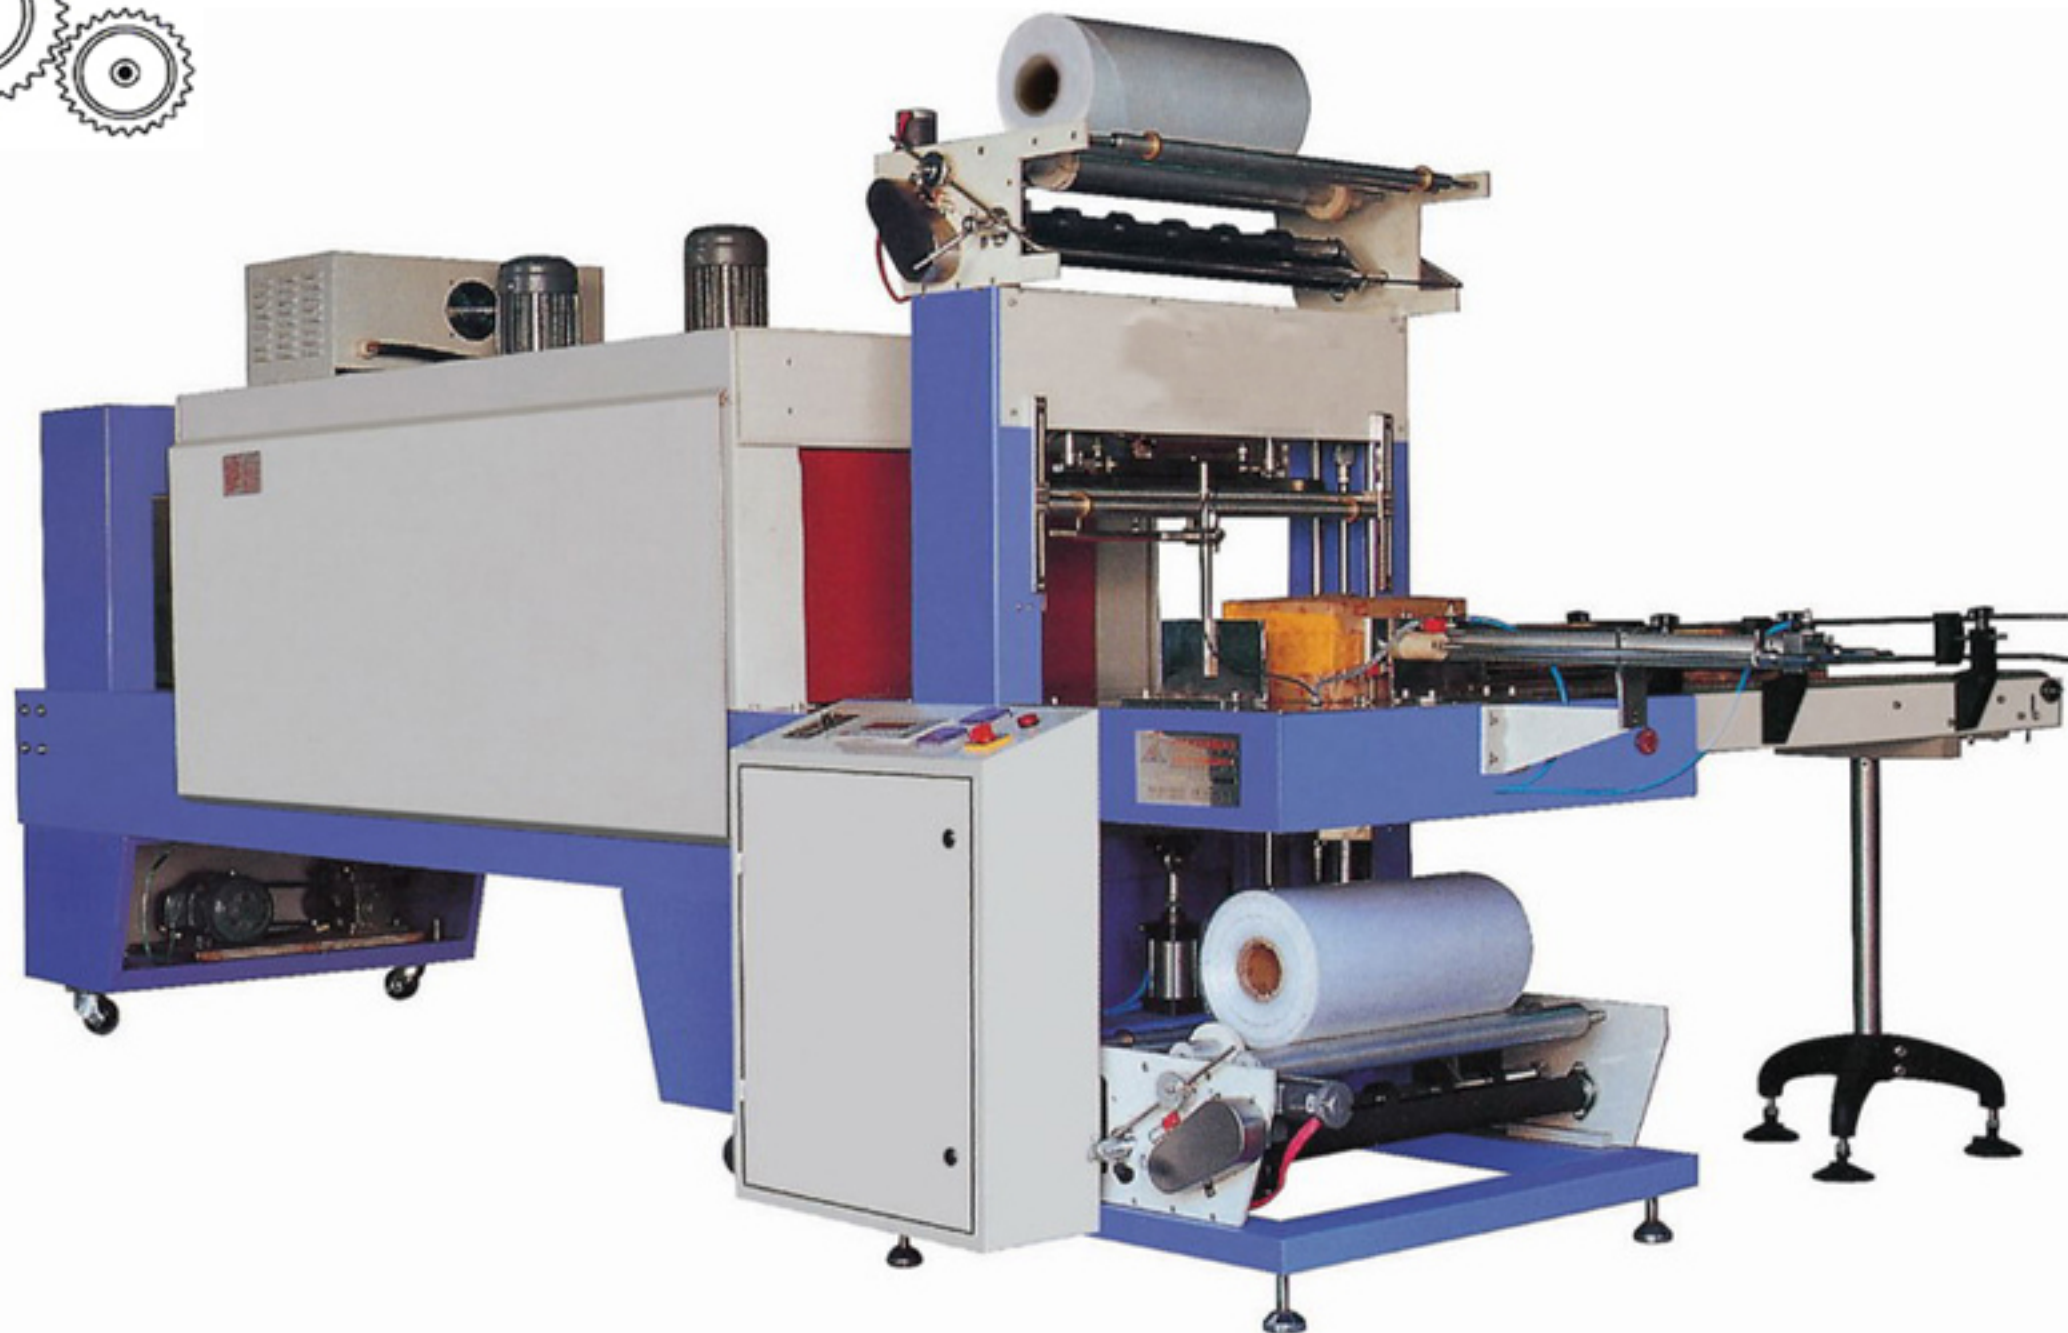



CARTON COLLATING & SHRINK WRAPPING MACHINE MODEL : IET-15 P






Shrink Wrapper

- The continuous-sealing wrappers

Maximum power required	4 KW
Overall machine dimensions	W 1705 x L 2035 x H 1200mm
Working plate height (on stand)	780mm
Machine weight	420kg
Minimum sealing dimensions	L ∞ x W 90mm
Maximum sealing dimensions	L ∞ x W 420mm
Maximum product height	200mm
Minimum film width	150mm
Maximum film width	650mm
Compressed air consumption	5-6 NI/cycle
Compressed air pressure	6 bar
Output	Variable according to the product

*notes: Technical data subject to variations without prior notice
Output depends on the operator and the type of the package

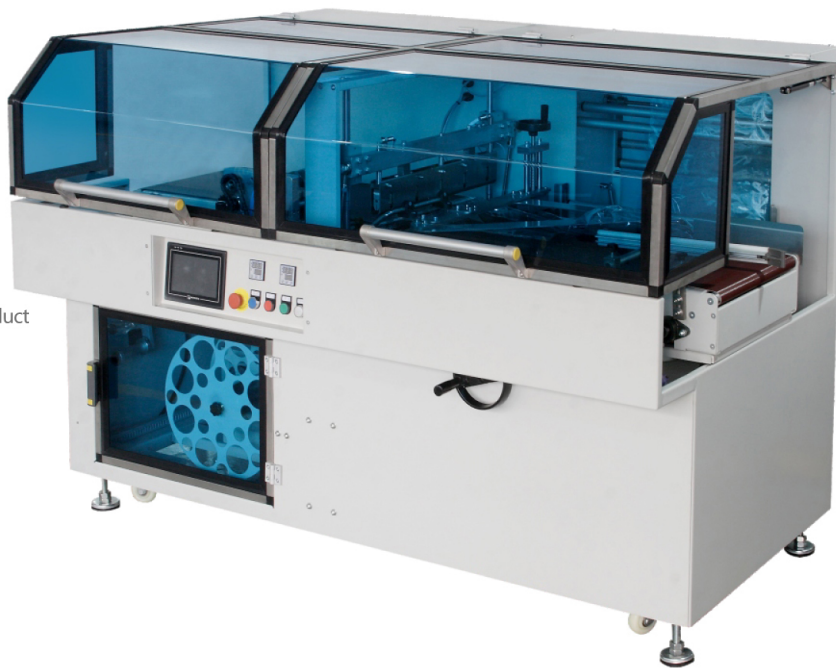



AUTOMATIC SLEEVE & SHRINK WRAP MACHINE



Technical data BMD-2200

Sealing type	4 sides sealing
Power supply	415V/50-60Hz/3phase
Product length	infinite
Sealing height	200 mm
Sealing width	1500 mm
Packing capacity	depends on product length
Film type	polyethylene (PE) film /POF film
Max film size	1500mm x 280mm x 1500mm (width) x 280mm(outer diameter)
Rated power consumption	2.5 kW
conveyor speed	20 variable, controlled by frequency converter, 20m/min
Working height	750-820 mm
Air pressure	≤0.5MPa (5 bar)
PLC	S7 SIEMENS S7
Sealing system	permanently heated seal bar coated with Teflon
Operating interface	Evview color touchscreen, display operation guidance and error diagnostic
Machine material	carbon steel
Weight	1000kg

Specifications on all machines can be changed upon request.

